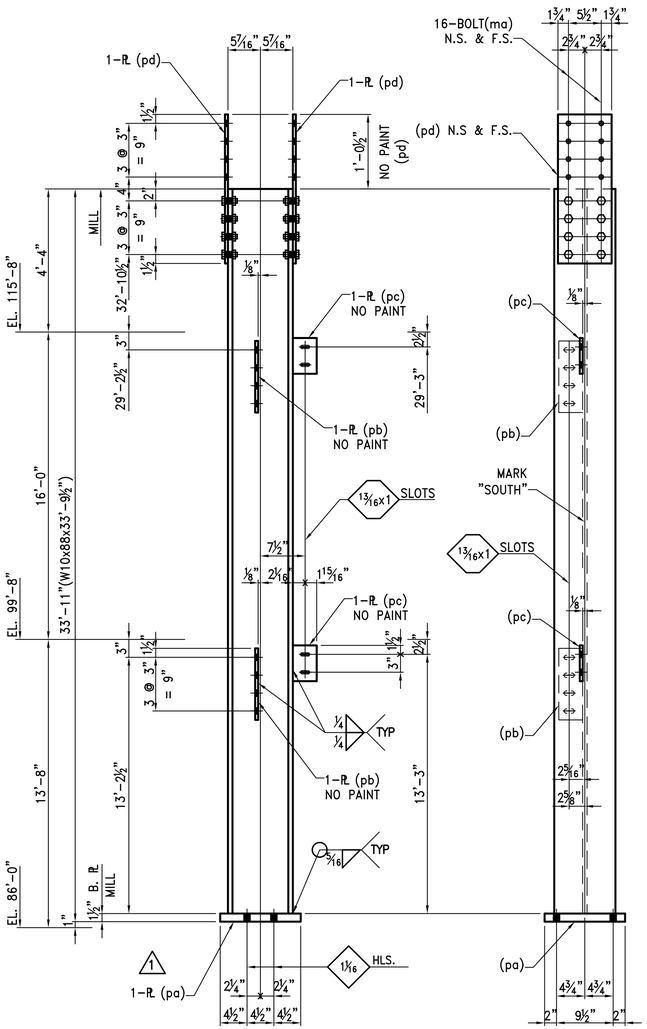

ONE – COLUMN – 5C1A

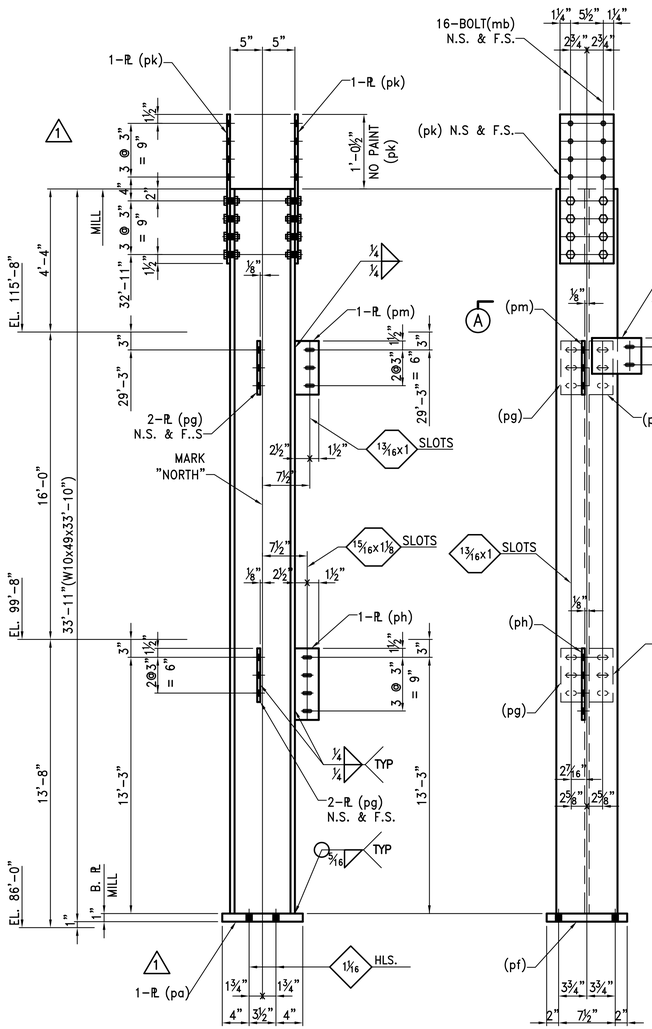

ONE – COLUMN – 5C2A



SECTION A – A

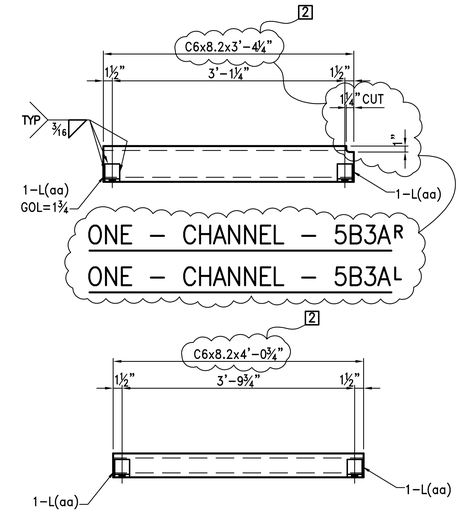

2 – CHANNEL – 5B4A

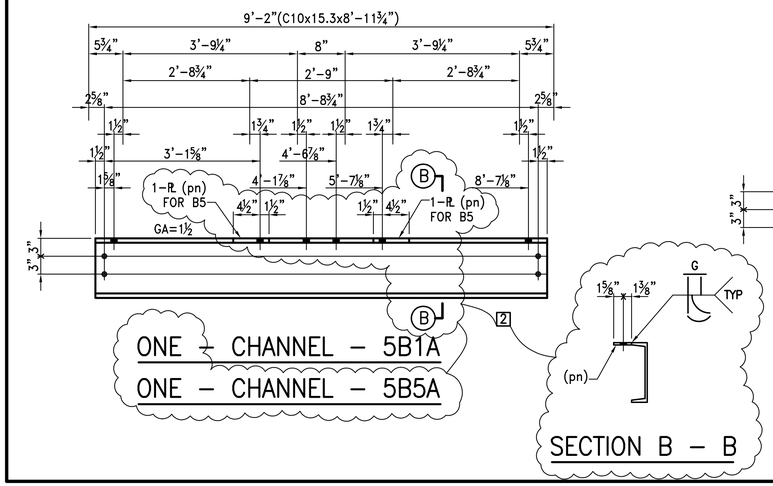

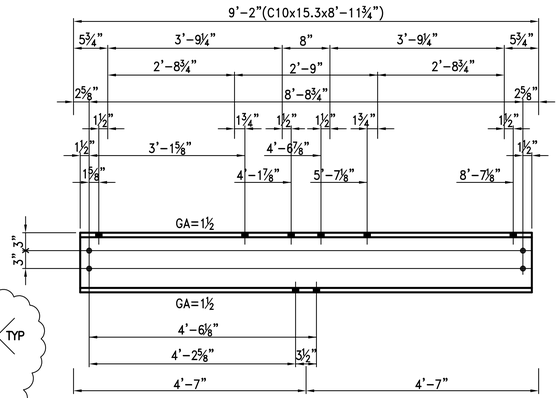

2 – CHANNEL – 5B2A

FIELD BOLTS

4 – ⅞øx2 A325 BOLT w/H.H. NUT & WA.

26 – ¾øx2 A325 BOLT w/H.H. NUT & WA.

16 – ¾øx2½ A325 BOLT w/H.H. NUT & 2 BEV. WA.

4 – ¾øx2¼ A325 BOLT w/H.H. NUT & 1 BEV. WA.

8 – ¾øx2 A325 BOLT w/H.H. NUT & 1 BEV. WA.

BILL OF MATERIAL

	NO REQ'D	MARK NO	DESCRIPTION	LENGTH FT	LENGTH IN	REMARKS	SAW CUT
	ONE	5C1A	COLUMN				
1	1		W10x88	33	9 1/2	A992 GR 50 M2E	
1	1	pa	PL 1 1/2 x 13 1/2	1	1 1/2		
	2	pb	PL 3/8 x 4	1	0		
	2	pc	PL 3/8 x 4	0	6		
	2	pd	PL 3/4 x 9	2	1		
	16	ma	3/4ø x 3 A325 BOLT				
			w/HH NUT & WA				
	ONE	5C2A	COLUMN				
1	1		W10x49	33	10	A992 GR 50 M2E	
	1	pf	PL 1 x 11 1/2	0	11 1/2		
	4	pg	PL 3/8 x 4	0	9		
	1	ph	PL 3/8 x 4	1	0		
	2	pk	PL 1/2 x 8	2	1		
	1	pm	PL 3/8 x 4	0	9		
	1	ha	PL 3/8 x 6	0	9	BEND	
	16	mb	3/4ø x 2 1/4 A325	BOLT			
			w/HH NUT & WA				
2	ONE	5B1A	CHANNEL				
2	1		C10x15.3	8	11 3/4		
2	2	5B2A	CHANNEL				
	2		C10x15.3	8	11 3/4		
2	2	5B3A^R/L	CHANNEL				
2	2		C6x8.2	3	4 1/4		
	4	aa	L3 x 3 x 1/4	0	2 1/2		
	2	5B4A	CHANNEL				
2	2		C6x8.2	4	0 3/4		
	4	aa	L				
2	ONE	5B5A	CHANNEL				
2	1		C10x15.3	8	11 3/4		
2	2	pn	PL 3/8 x 3	0	6		

REV	DESCRIPTION	DATE
4		
3		
2	REV 5B1 5B3 & 5B4	4/19/07
1	REV 5C1 & 5C2	3/28/07

SHOP NOTES
MAT'L A36 U.N.
OPEN HLS. 13/16" U.N.
WELDING E70XX
PAINT 1 S/C PRIMER

WILSON IRON WORKS, INC.
1150 EAST SUMMIT ST.
CROWN POINT, IN
(219) 663-7900 – 769-8686

PROJECT CENTIER BANK NEW CORPORATE OFFICE BLDG.
MERRILLVILLE, IN
G.C. BERGLUND CONSTRUCTION

JOB NO. S07001
DRAWN BY KRS
DATE 1/23/07
CHK'D BY CS
DRAWING NO. 5